

## PRODUCT ID: 35620

### Outdoor Blank-out LED Backlit Sign

#### MODEL

PHX1418GR-I942



#### DIMENSIONS

14" H x 18" W x 2.25" D (est. 6.121 lbs)

#### CLASS

Class: PHX Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Cabinet: 1-piece, corrosion resistant, extruded all-weather frame, 2.25" deep.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

Mounting Channel: None

#### ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

#### MESSAGE

Color: Black opaque


Font: Swiss 721 Bold BT

Illumination: Backlit with high intensity LEDs. Message blanks out when off

Sign Messages: See message table below

## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

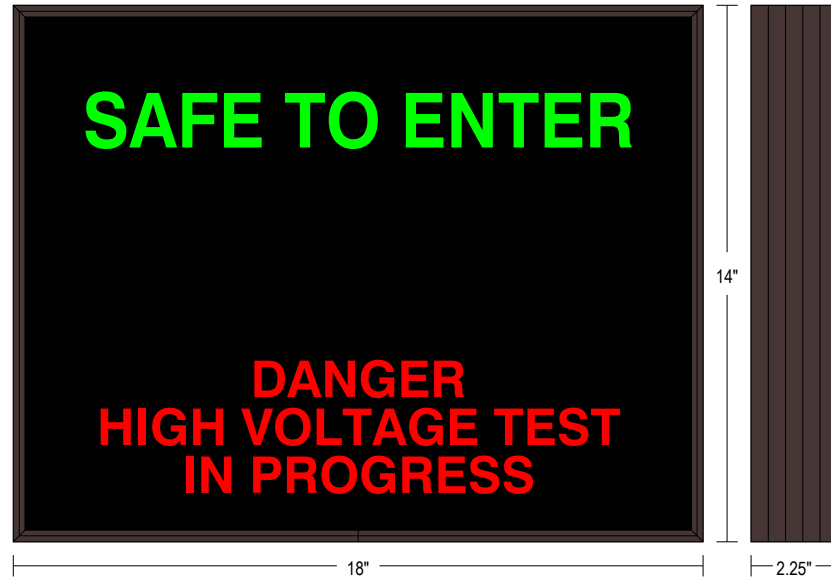

MESSAGE	LED/COLOR	HEIGHT	AMPS
SAFE TO ENTER	Green Wide Angle LED	1.5"	0.195-0.084
DANGER HIGH VOLTAGE TEST IN PROGRESS	Red Wide Angle LED	1.0"	0.131-0.057


NOTE: Above messages are independently controlled.

iSIGNS Inc.  
7625 Birkmire Drive  
Fairview, PA 16415  
Phone: 866-437-3040  
Website: [www.isignsled.com](http://www.isignsled.com)



Proudly Made in the USA

### Sample Display Options

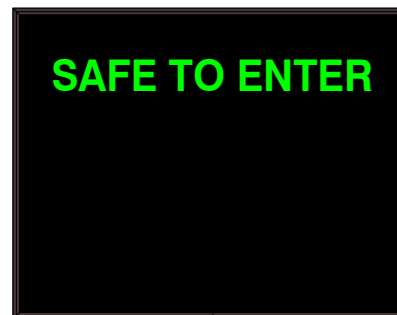

### Frame Detail

