

PRODUCT ID: 46972

Outdoor Blank-out LED Backlit Sign

MODEL

PHX1418DGRGR-220/120-277VAC



DIMENSIONS

14" H x 18" W x 5.5" D (est. 17.032 lbs)

CLASS

Class: PHX Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: Corrosion resistant, extruded aluminum frame. 5.5" deep, mitered construction.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Double Faced Sign

Finish: Duranodic Bronze

Mounting Channel: None

ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Black opaque

Font: Swiss 721 Bold BT

Illumination: Backlit with high intensity LEDs. Message blanks out when off

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
OPEN	Green Wide Angle LED	3.5"	0.195-0.084
FULL	Red Wide Angle LED	3.5"	0.131-0.057
OPEN	Green Wide Angle LED	3.5"	0.195-0.084
FULL	Red Wide Angle LED	3.5"	0.131-0.057

NOTE: Above messages are independently controlled.

iSIGNS Inc.

7625 Birkmire Drive

Fairview, PA 16415

Phone: 866-437-3040


Website: www.isignsled.com




Proudly Made in the USA

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

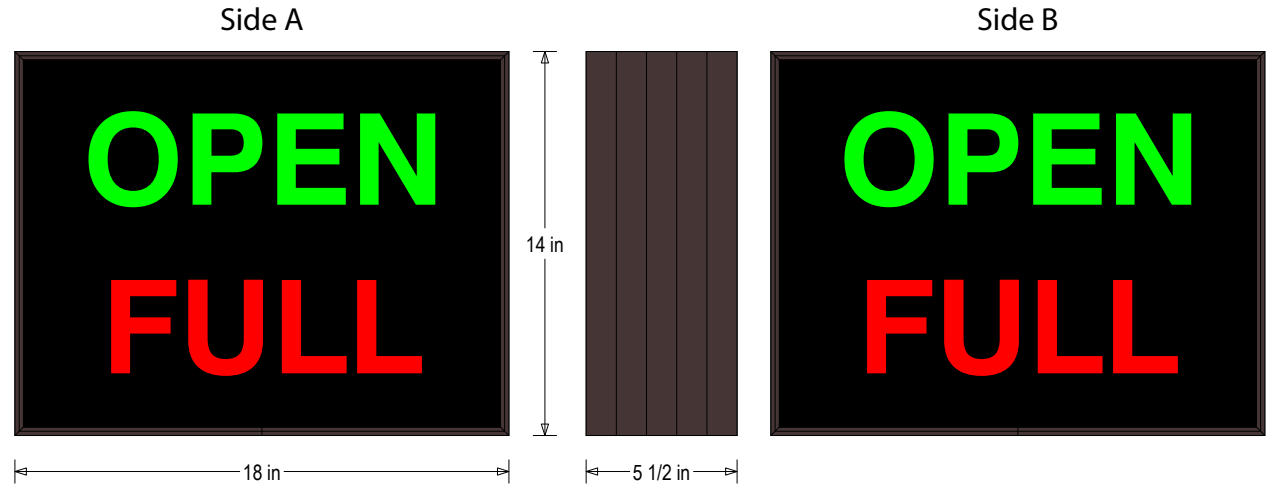

Sample Display Options

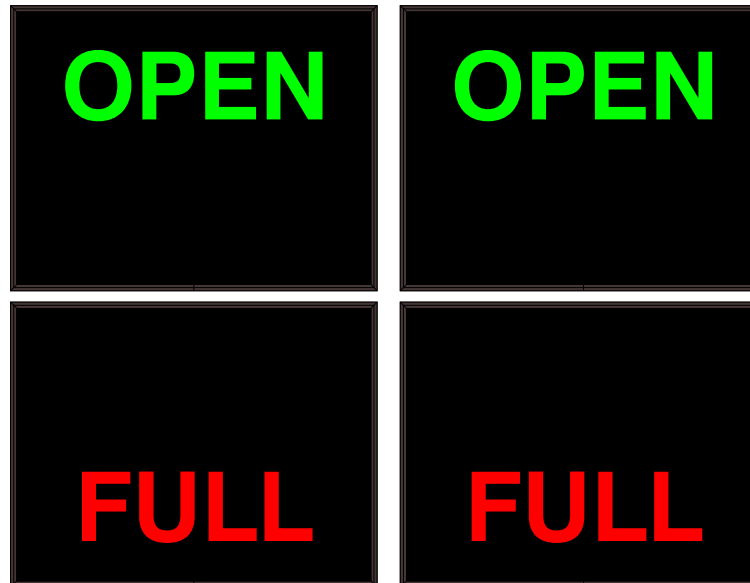

Frame Detail

