

PRODUCT ID: 50081

Indoor Blank-out LED Backlit Sign

MODEL

SBL2530RGRRR-B766/120-277VAC



DIMENSIONS

25" H x 30" W x 2.25" D (est. 55022.024 lbs)

CLASS

Class: SBL Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: 1-piece, corrosion resistant, extruded all-weather frame, 2.25" deep.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed

MESSAGE

Color: Black opaque

Font: Swiss 721 Bold BT

Illumination: Backlit with LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
BEAM OFF	Red Wide Angle LED	2.375"	0.065-0.028
BEAM ON	Green Wide Angle LED	2.375"	0.098-0.042
READY	Red Wide Angle LED	2.375"	0.065-0.028
X-RAY ON	Red Wide Angle LED	2.375"	0.065-0.028
GENERATOR ON	Red Wide Angle LED	2.375"	0.065-0.028

NOTE: Above messages are independently controlled.

iSIGNS Inc.

7625 Birkmire Drive

Fairview, PA 16415

Phone: 866-437-3040

Website: www.isignsled.com




innovative sign technologies inc.


Proudly Made in the USA

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

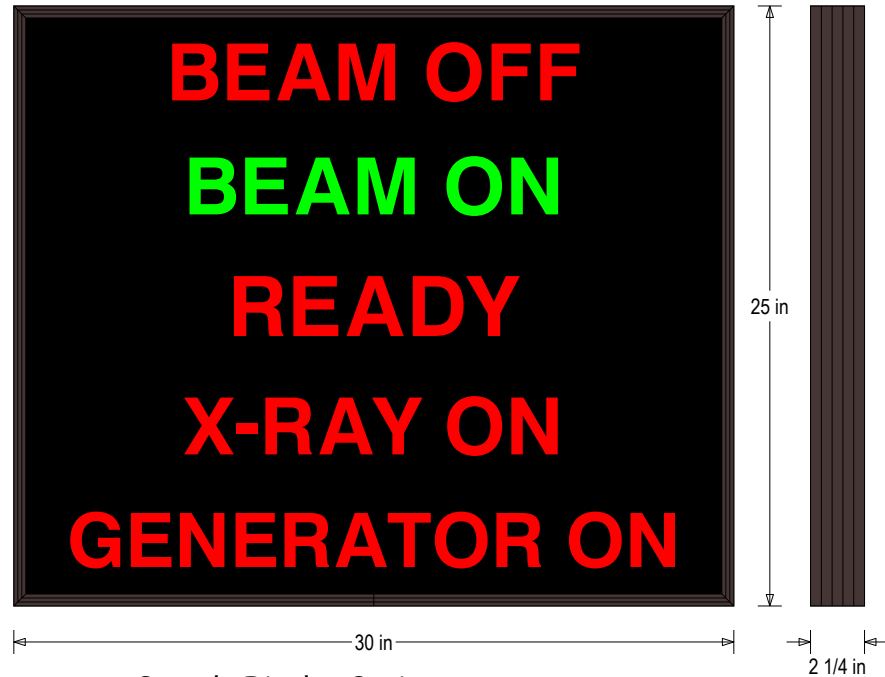

Sample Display Options

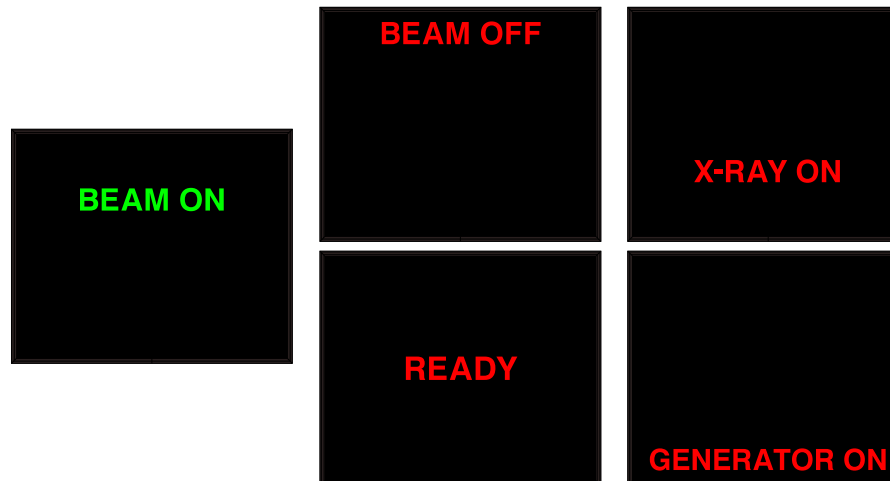

Frame Detail

