

# Ceiling Mount Bracket CM7

**PRODUCT ID**  
1971

**DIMENSIONS**  
4" H x 7" W x 2" D

**CONSTRUCTION**  
Material: 3/16" architectural aluminum angle 6063-T6. Mounting holes pre-drilled.

**MISCELLANEOUS**  
Finish: Duranodic Bronze

NOTE: Other LED colors, voltages, cabinet sizes, styles, and colors available.





**iSigns**  
7625 Birkmire Drive  
Fairview, PA 16415  
Phone: 866-437-3040



Proudly Made in the USA

## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

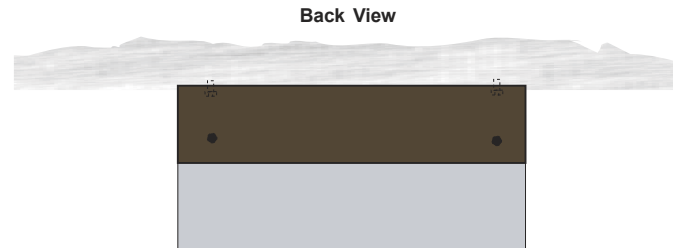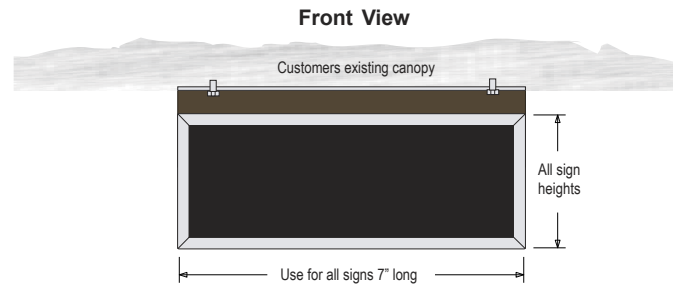

### Ceiling Mount

- Remove the back panel.
- Mount the ceiling bracket to the desired surface (*Fasteners Not Supplied*).
- Mount the back panel to the ceiling bracket (*Fasteners Not Supplied*).



**Note:** Make appropriate wiring connections per local codes.

**Note:** Do not over tighten or distort back panel. Hang the cabinet on the top edge of the back panel

- Hinge cabinet back and replace the screws that were removed in step one on the reverse side.

