

## Recessed Frame Wall Mount TC / TCL

### PRODUCT NUMBER

22177

### DIMENSIONS

See chart below for dimensions; Size dependent upon sign size.

### CONSTRUCTIONS

Extruded aluminum posts with end caps welded to optional 6" x 6" aluminum plates; painted standard Duranodic Bronze.

### INSTALLATION METHOD

1/8" Bent aluminum plate; Painted standard Duranodic Bronze.

### SYSTEM USES


Available for all signs.

### CUSTOMIZABLE

Standard Duranodic Bronze; custom sizes and colors available

## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

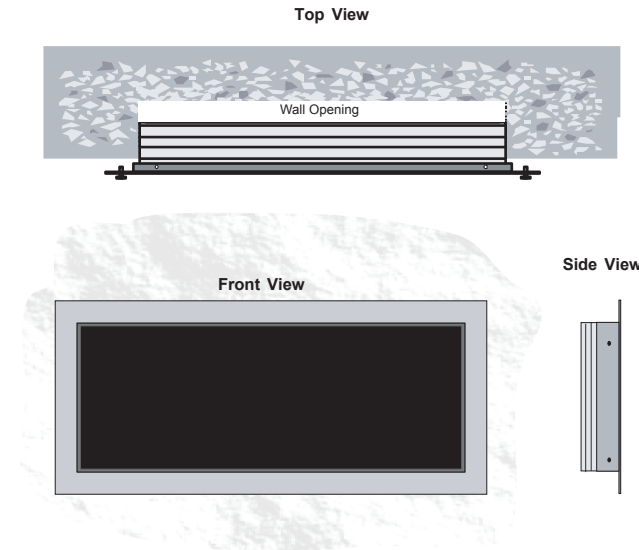


## Recessed Frame Sizes

Model	Wall Opening	Outer Dimension
TC/L V/H	7 1/2" x 14 1/2"	10 3/4" x 17 3/4"
TC/L/U 718	7 1/2" x 18 1/2"	10" x 21"
TC/L 726	7 1/2" x 26 1/2"	10" x 29"
TC/L/U 734	7 1/2" x 34 1/2"	10" x 37"
TC/L 742	7 1/2" x 42 1/2"	10" x 45"
TC/L/U 1418	14 1/2" x 18 1/2"	17" x 21"
TC/L 1426	14 1/2" x 26 1/2"	17" x 29"
TC/L 1434	14 1/2" x 34 1/2"	17" x 37"
TC/L 1442	14 1/2" x 42 1/2"	17" x 45"

Model	Wall Opening	Outer Dimension
TC/L 2118	21 1/2" x 18 1/2"	24" x 21"
TC/L 2126	21 1/2" x 26 1/2"	24" x 29"
TC/L 2134	21 1/2" x 34 1/2"	24" x 37"
TC/L 2818	28 1/2" x 18 1/2"	31" x 21"
TCL 77	7 1/2" x 7 1/2"	10" x 10"
TCL 1026	10 1/2" x 26 1/2"	13" x 29"
TCL 1212	12 1/2" x 12 1/2"	15" x 15"
TCL 1818	18 1/2" x 18 1/2"	21" x 21"

## Installation

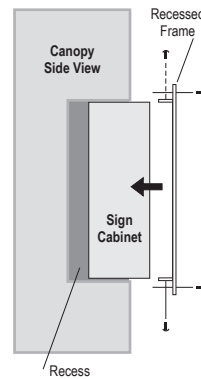

### Recessed Frame Mount

- Fasten the recessed mounting bracket flush with the front of the LED traffic controller cabinet, with the supplied fasteners.
- Slide assembled unit into the recess opening.
- Fasten the mounting bracket to the face of the opening with four fasteners (*Not Supplied*).

**⚠ Note:** Make appropriate wiring connections per local codes.